

SIMPO

Addressable Fire Alarm Panel

EN54-2/4

Description

Simpo is the perfect cost effective solution for smaller addressable installations. It is an up to two loop panel with coverage of 48 zones. 250 devices with Teletek Electronics protocol could be connected to each loop. System status is visualized via LCD display and LED indication. The panel comes in a metal casing with a multilanguage display and front foil for easier customization.

Direct programming with *ProSTE* software.



Functional Specifications

Loops	Up to 2
Devices per loop	250
Zones	48
Outputs (monitored, relay)	5
Outputs (non monitored, programmable, relay)	4, 15A/24VDC
Inputs	3
Memory LOG	10 240
Display	4*40 symbols
Multilanguage support	Yes
Day/Night Mode	Yes



DoP No: 001

1293-CPR-0401
Tested by EVPU

Technical Specifications

Main Power Supply	90 ÷ 264 VAC
Frequency	47 ÷ 440 Hz
Back-up Power Supply	1 battery, 12V/ 18Ah
Electrical output	4,2A
Operating temperature	-5°C to +50°C
Relative humidity resistance	95 %
Weight (without battery)	~4,2kg
Dimensions	306x412x81,2mm

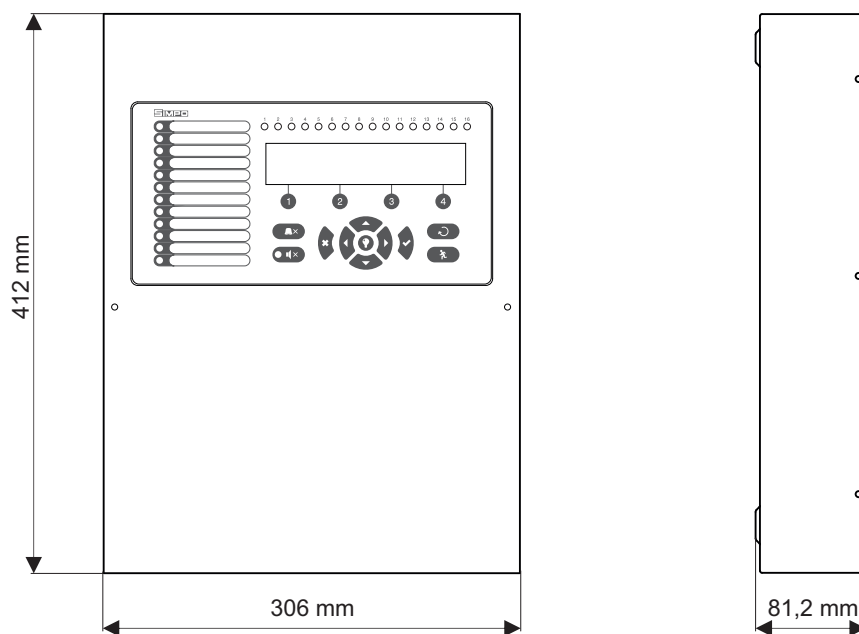
Compatible Products

- **Simpo TTE Loop** - Expander for 1 loop
- **SensolRIS Detectors** - Heat, optical-smoke and combined detectors
- **SensolRIS Modules** - Zone, Input-output and other module
- **SensolRIS Sounders/Strobes** - Sounders, sounders with strobes (VADs), base with sounders
- **ProSTE Programming Software** - Special software for programming of Teletek Electronics products

Contact Information:

SIMPO

Addressable Fire Alarm Panel

EN54-2/4

● Packing Information

- **Single packing box** - 1 unit SIMPO Fire Alarm Panel, dimensions 420x314x90mm
- **Carton packing box** - 3 units SIMPO Fire Alarm Panel, dimensions 445x305x340mm

● Contact Information: