

VTH1560B/BW

IP Indoor Monitor



Technical Specification

Model VTH1560B/BW

System

Main Processor Embedded Micro Processor

Operation System Embedded LINUX OS

Video

Video Compression H.264

Audio

Audio Compression G.711

Audio Input All-direction Microphone

Audio Output Built-in Loudspeaker

Bidirectional Talk Support Dual-way Bidirectional talk

Display

LCD Screen 7" 800x480, Capacitive

Operation Mode

Input Touch buttons

Interface

Alarm In 6

Alarm Out -

RS485 -

Network

Ethernet 10M/100Mbps Self-adaptive

Network Protocol TCP/IP

General

Memory Slot Embedded 4GB


Features

- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Embedded 4GB SD card
- Record & Snapshot




Installation	Flush
Power	DC 12V/ supply directly by VTNS1060A
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	221.2mm×154.3mm×24.2mm
Weight	0.8Kg

Dimensions

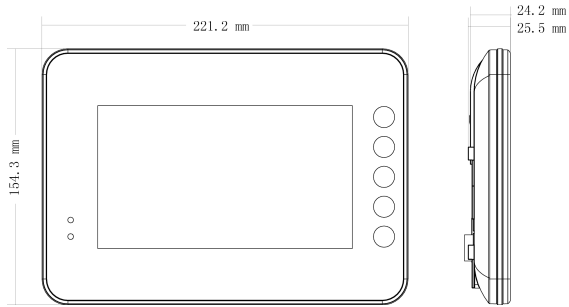

View Area

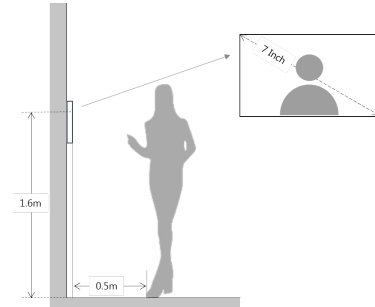

Application

