

VTO1220BW Apartment Outdoor Station



Technical Specification

•	
Model	VTO1220BW
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/2.7" 1.3MP CMOS
Lens	4mm
Angle of View	D:95° H:75°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	3.5" TFT 320x240
Operation Mode	
Keypad	Touch Button
Reader	Mifare Card
Approaching Induction	
Body approaching	0.6m
Interface	

1

Door Control


Features

- HD CMOS camera
- · Tempered glass panel, IP65
- \cdot Night vision & Voice indication
- \cdot Local card openning
- \cdot Video & Audio messaging
- \cdot Flush mounted




Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps
Network Protocol	TCP/IP
General	
Ingress Protection	IP65
Tamper Switch	1
Installation	Flush
Material	Tempered glass
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	150.0mm×408.0mm×46.4mm
Weight	1.6Кg

VTO1220BW

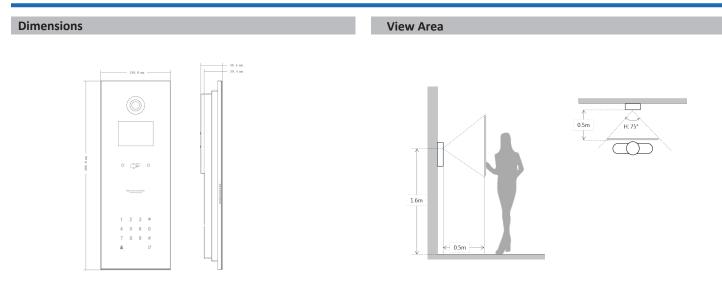

Application

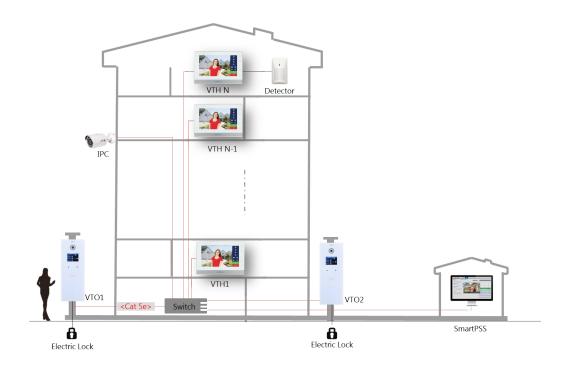



Rev 001.001 © 2018 Dahua . All rights reserved. Design and specifications are subject to change without notice