

קט מודולרי IP דו-גידי מסדרת VTO-4202



פאנל וילה בעיצוב יוקרתי הכולל:

התקנה על זוג גידים בלבד, וממשק IP

פנל אלומיניום כסוף בטכנולוגיית IP

מצלמת IP ברזולוציה 2MP כולל תאורת לילה,

מפתח מצלמה 160° (Fisheye)

מקודד – משמש לפתיחה/דפדוף בין דיירים

תמיכה בשני מנעולים – **חיבור ישיר לפנל**

אפליקציה לטלפונים ניידים, לצפייה, דיבור

ופתיחה מרוחקת (מכל מקום בעולם!)

מוגן מים - IP65 & IK07

מוניטור לשימוש פנימי מבוסס דו-גידי עם WIFI

מסך נגיעה 7 אינץ' TFT 1024X600

6 ערוצי כניסת אזעקה

ערוץ אחד ליציאת אזעקה

פענוח וידאו H.265 ו- H.264

ביצועים גבוהים וחסכוניים

צפייה במצלמות IP

מק"ט סינאלי:

7402222 קט להתקנה מתחת הטיח


7402223 קט להתקנה על הטיח

מתאם דו-גידי עם ספק כח

כניסת 2 גידים לחיבור עד 6 פנלים/מוניטורים.

כניסת רשת - RG-45 – חיבור לרשת/אפליקציה

כניסת מתח – 48 VDC, 1.25 A

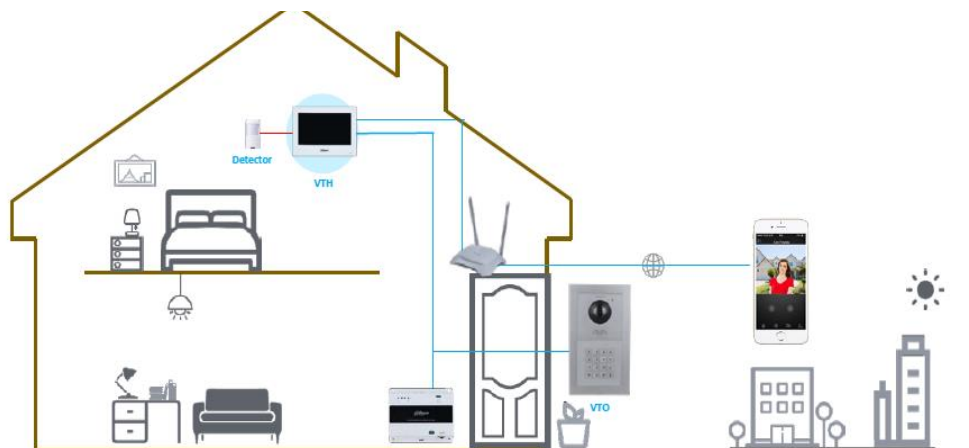

נתונים טכניים:

DHI-VTO4202F-P-S2	
System	
Embedded processor	Main Processor
Embedded Linux Operation System	Operating System
Mechanical	Button Type
ONVIF; CGI	Interoperability
RTSP; RTMP; HTTP/HTTPS; DNS; FTP; UPnP; RTP; SIP; SSH; ONVIF ; P2P	Network Protocol
128 MB	ROM
256 MB	RAM
1 GHz	CPU
Basic	
1/2.5" 2MP CMOS Low Illumination HD Colorful Fisheye Camera	Camera
H: 168.6°; V: 87.1°; D:176.7°	Field of View
1.9 mm	Focal Length
120 dB	WDR
3D NR	Noise Reduction
H.265; H264	Video Compression
50Hz: Main Stream (720p@25 fps), sub stream (1080p@25 fps)60Hz: Main Stream (720p@30 fps), sub stream (1080p@30 fps)	Video Resolution
25 fps	Video Frame Rate
256 Kbps to 4 Mbps	Video Bit Rate
Auto IR	Light Compensation

Receive and view text information released by the management center	Information Release
Do not disturb period can be set; Do not disturb mode	DND Mode
Villa: 3 Apartment: 2	Number of Extensions
Yes	Wi-Fi
IEEE802.11b/802.11g/802.11n	Wireless Standard
2.4 GHz	Wireless Frequency Range
WPA/WPA2;WPA-PSK/WPA2-PSK	Wireless Security Encryption
Performance	
PC + ABS	Casing
Port	
6	Alarm Input
1	Alarm Output
1 (12 V/200 mA)	Power Output
Yes (use any alarm input port)	Door Bell
One two-wire port and one 10Mbps/100Mbps Ethernet port (one of them can be selected)	Network

DHI-VTH2622GW-W	
System	
Embedded processor	Main Processor
Embedded Linux operating system	Operating System
RTSP; RTP; SIP; DNS; SSH	Network Protocol
128 MB	ROM
128 MB	RAM
Dual core 1.2 GHz	CPU
Basic	
Capacitive touchscreen	Screen Type
7" TFT	Display
1024 × 600	Screen Resolution
G.711a; G.711u; PCM	Audio Compression
1	Audio Input
Built-in speaker	Audio Output
2-way Audio	Audio Mode
Echo suppression	Audio Enhancement
16 kHz; 16 bit	Audio Bit Rate
Function	
Digital 2-wire	Communication Mode

DHI-VTNS1001B-2-A	
System	
Embedded processor	Main Processor
Basic	
2	Status Indicator Light
Function	
Full digital; 2-wire	Communication Mode
Performance	
PC + ABS	Casing
Basic	
2	Status Indicator Light
Port	
One RJ45 port, 10 /100 Mbps self-adaptiveOne 2-wire device port	Network
General	
White	Color
48 VDC, 1.25 A	Power Supply
Included	Power Adapter
Guide rail mount	Installation
CE; FCC; UL	Certifications
Power converter cable	Accessory
131 mm × 103 mm × 40 mm (5.16" × 4.06" × 1.57")	Product Dimensions
-10 °C to +55 °C (14 °F to 131 °F)	Operating Temperature
10%–95% RH (non-condensing)	Operating Humidity
Beneath 3,000 m (9,842.52 ft)	Operating Altitude
≤ 15 W (KIT)	Power Consumption
0.25 kg (0.55 lb)	Net Weight
0.81 kg (1.78 lb)	Gross Weight

התקנה על הטיח

התקנה תחת הטיח



DHI-VTH2622GW-W

DHI-VTO4202F-P-S2

VTO4202F-MK

DHI-VTH2622GW-W

DHI-VTO4202F-P-S2

VTO4202F-MK



DHI-VTNS1001B-2-A

VTM125

VTM127

DHI-VTNS1001B-2-A

VTM125

VTM52R2

מידות מסגרת: **24X14X7**
מידות קופסה: **26.2X14.5X7.5**

מידות מסגרת: **24X14X7**
מידות קופסה: **23.3X13.3X6.8**

